

DIRECTION FOR USE

First surface should be free from all loose and flaking material before painting.

Apply one or two coats of Lion Water thinnable cement Primer.

Rub down the surface with sand paper.

Fill up the dents with wall putty rub down with sand paper, dust of and apply 2 coats of Lion Acrylic Distemper after thinning one kg of Paint with 650-750ml. water.

Finish is smooth and durable

During Painting:

Always work in a well ventilated area. Wear appropriate attire. Especially gloves and eye protection gear. Avoid contact with skin as it may cause irritation.

Cleaning:

Wash all tools with clean water immediately after application.

Safety instructions

In case of eye contact, rinse immediately with water and seek medical advice. In the event of spillage cover by using sand and earth.



Dealer Details

TIMBER COLLECTION



Art-O-Craft 2280 3458

LION

AN ISO 9001:2008 CERTIFIED ORGANISATION

Acrylic Distemper



*Universal
Stainer*



Manufactured & Marketed by :


SWAN PAINT & VARNISH WORKS

153, Manicktolla Main Road,
Kolkata-700 054, Ph. : 033 2320 3161
Website : www.swanpaint.com

UNIVERSAL STAINER



ACRYLIC DISTEMPER

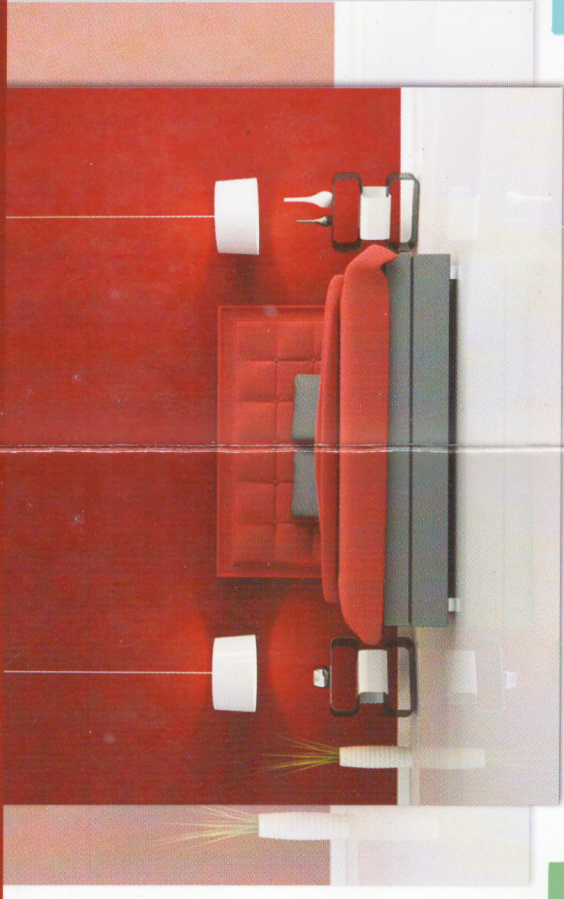

MASS TONE
100% Concentration

Fast Yellow

Yellow Oxide

Fast Yellow Green

Fast Green

REDUCED TONE
1:100

MASS TONE
100% Concentration

Red Oxide

Fast Red

Fast Blue

Fast Violet

REDUCED TONE
1:100

Pista

Electric Blue

Mayur

Aasmani

Mayur

Jamuni

Suraj

Candy

Pale Cream

Badami

Rose Pink

Pale Rose

Rose Pink

Strawberry

Chandan

Pastel Green

Coffee